HEAVY DUTY PUMPS

PIUSI

EN The careful analisys of the market and the experience of handling agressive fluid, such as DEF, leads PIUSI to develop a new type of membrane pump equipped with electric motor without any dinamic seals. This solution allows to obtain a reliable industrial pump together with self priming capabilities.

ES Un minucioso estudio del mercado y la experiencia en manejar liquidos agresivos, tal como DEF, han empujado PIUSI en desarrolar un nuevo tipo de bomba a membrana equipado con motor electrico sin estanquidad dinamica. Esta solucion permite de obtener una bomba industrial con una mayor fiabilidad y autocebante.

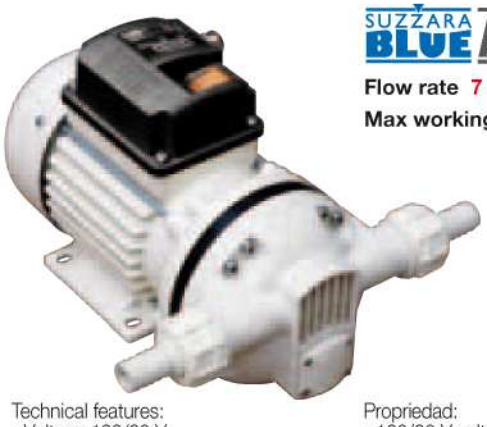

SUZZARA BLUE AC PUMP

Flow rate **7** ÷ **9** gpm

Max working pressure **20** psi

Technical features:
- Voltage 120/60 V
- Hose tail connection 3/4"
- Absence of dinamic seals
- ON/OFF switch
- 6 ft cable with socket

Propriedad:
- 120/60 V voltaje
- Conexion 3/4"
- Sin estanquidad dinamica
- ON/OFF interruptor
- 6 ft de cable con enchufe

SUZZARA BLUE DC PUMP

Flow rate **7** ÷ **9** gpm

Max working pressure **20** psi

Duty cycle **30** min

Technical features:
- Voltage 12 / 24 V
- Hose tail connection 3/4"
- Absence of dinamic seals
- ON/OFF switch
- 6 ft cable with socket
- handle availble (on request)

Propriedad:
- 12 / 24 V voltaje
- Conexion 3/4"
- Sin estanquidad dinamica
- ON/OFF interruptor
- 6 ft de cable con enchufe

Code	Description	Flow rate gpm	Volt/Hz	Rpm	Watt	Amp	Cables	Connections IN	Connections OUT	On-Off Switch	Weight lb	Packaging inch
F00203000	SuzzaraBlue AC pump 120V	7 ÷ 9	120/60	1700	370		Yes		hose tail 3/4"	Yes	11,5	7,6x14x10,6
F00204000	SuzzaraBlue DC pump 12V	7 ÷ 9	12	2800		18	Yes		hose tail 3/4"	Yes	8	7,6x14x10,6
F00204010	SuzzaraBlue DC pump 24V	7 ÷ 9	24	2800		9	Yes		hose tail 3/4"	Yes	8	7,6x14x10,6

HAND PUMP

Flow rate **4** gpm

EN The delivery system includes an hand pump easy to install and to remove from the drum. The delivery is realised through the spout.

ES El grupo de suministro está constituido por una bomba de mano fácilmente aplicable y removible de un bidón. Las operaciones de trasiego se efectúan por medio del correspondiente caño.

Cod. **F00332050**

Cod. **F00332140**

Cod. **F00332120**

Cod. **F00332130**

Code	Description	Flow rate gpm	Spout BSP	Dip pipe	Inlet pumps NPS	2,5" x 5 buttress adaptor	Delivery hose Feet	Weight lb	Packaging inch
F00332050	Rotative hand pump with dip pipe	4	-	•	1"		-	3,3	6,5x13,6x5,7
F00332140	Rotative hand pump with complete kit	4	3/4"	•	1"	•	9,8	5	18,9x14,6x10,4
F00332120	Piston hand pump with dip pipe	4	-	•	1"	•	-	3,3	6,5x13,6x5,7
F00332130	Piston hand pump with complete kit	4	3/4"	•	1"	•	9,8	8	18,9x14,6x10,4
R16767000	2,5" x 5 buttress adaptor								